

Franklin Fence Co.

PO Box 66 • Vergas, MN 56587

Ph. 218-342-2084
Fax 218-342-2723

ESTIMATE

Customer City of Vergas

Street _____ Phone _____
City _____ State _____

Job No. _____ Date: 10/23/20
Deliver To: _____

Address: _____
Directions: _____

	QTY.	DESCRIPTION	EXT. QTY.	UNIT PRICE	UNIT	EXTENSION
1						
2						
3						
4	1	7'-4"x3'-6" Cookson Model ES10				
5		Canter Shutter				3780cc
6		Installed by Twin City Garage Door				
7						
8						
9						
10						
11		93780.00				
12		9378.77				
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						
25						
26						
27						
28						
29						
30						

Subtotal	
Delivery	
Sales Tax	
TOTAL	

This estimate is for materials listed above only and is not guaranteed to build or complete any specific project. It is based on pricing as of this date. Prices are subject to change due to a changing market and/or availability. Clerical errors are subject to correction.

ELECTRICAL EQUIPMENT LIST:

BOTTOM BAR LOCKING:

Type - Locking wing thumb latch

QUANTITY & MARK:

(1) 100

Operable Side(s) - Coil only


~~Curtain Aluminum, clear-anodized-204-R1~~

Bottom Bar - Extruded aluminum, clear anodized 204-R1

Guides - Extruded aluminum, clear anodized 204-R1

Hood - Aluminum, clear anodized 204-R1

Plain Steel - Powder coated gray

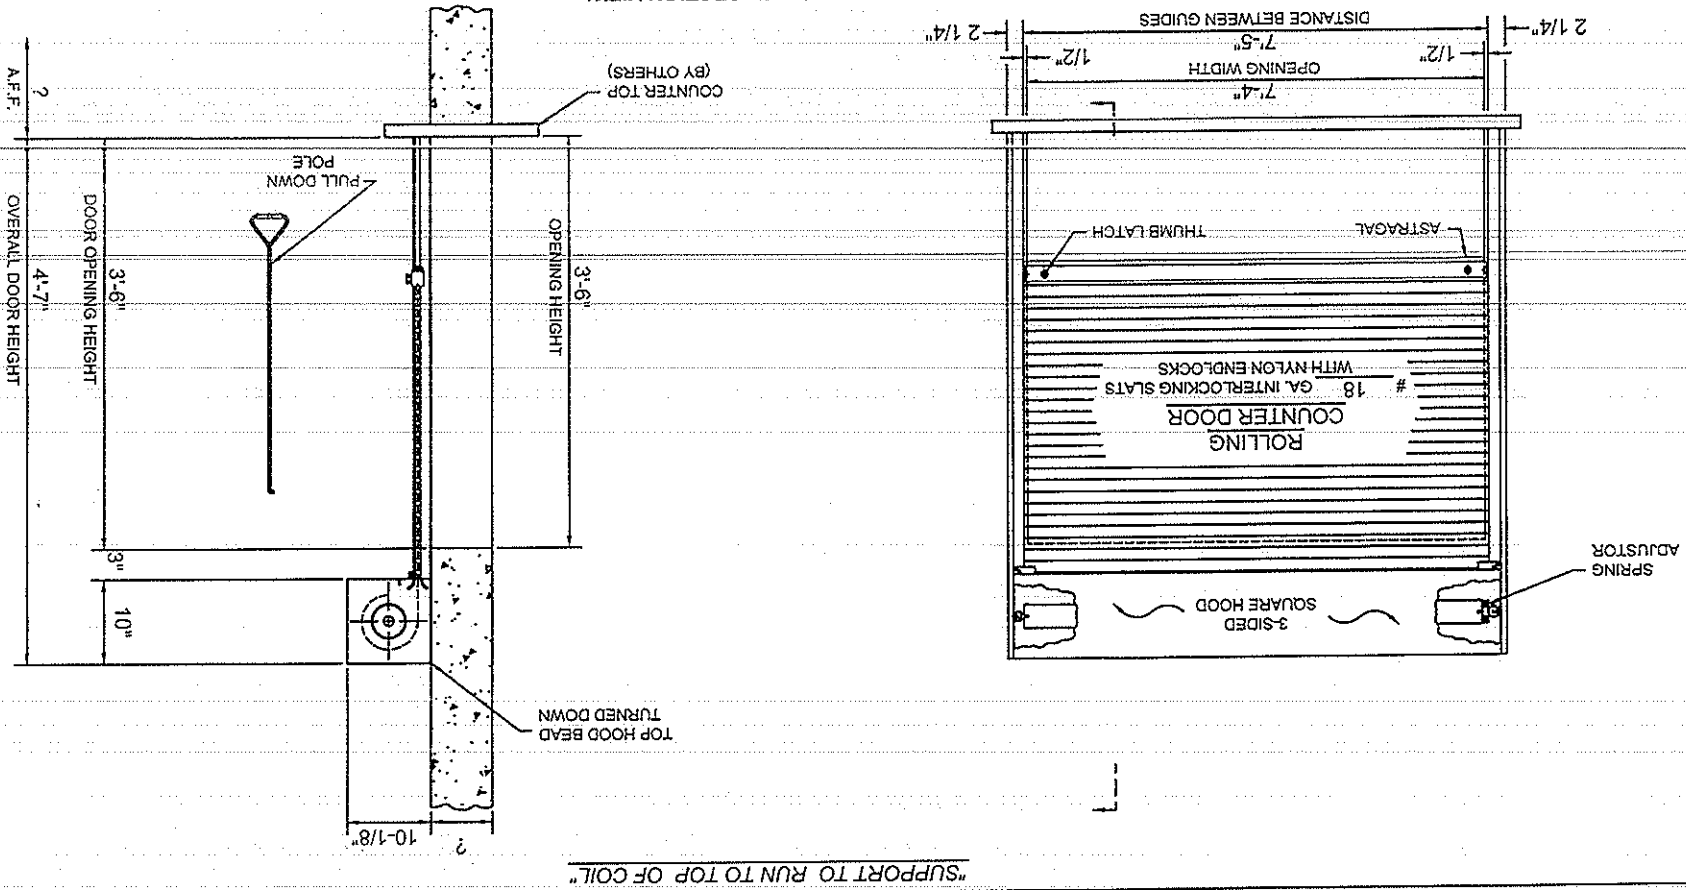

ELEVATION (COIL SIDE) AND SECTION VIEW

PRODUCT CODE:

BSE - CDAR

Figure 1

#	REVISION	DATE	BY
---	ORIGINAL DRAWING	10/23/20	K621

COOKSON
Preferred door solutions.

PUSH-UP OPERATED
ROLLING COUNTER DOOR

Job:

VERGAS COMMUNITY CENTER

ARCHITECT:

CONTRACTOR:

TWIN CITY GARAGE DOOR


AGENT:

ESC10

JOB #:

F 01505282 001 A


05-08-2020		CD1 EXT		PFI 1F 18AA		PRODUCT CODE	
DISTANCE BETWEEN GUIDES		MODEL #:		ESC10		JOB #:	
AGENT:		TWIN CITY GARAGE DOOR		CONTRACTOR:		ARCHITECT:	
COUNTER DOOR		EXTRUDED GUIDE ASSEMBLY		JOB:		VERGAS Community Center	
COOKSON		Preferred door solutions.		BY		DATE	
				K621		10/23/20	
#		REVISION		DATE		BY	
1		ORIGINAL DRAWING		10/23/20		K621	

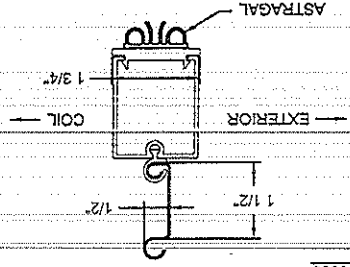


CP6005

BOTTOM BAR / SLAT DETAIL

PLAN OF OPENING MK: 001

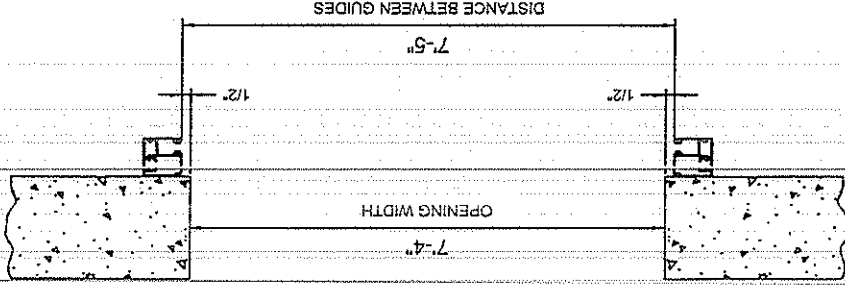

WALL FASTENERS:
 AT MAXIMUM 18" ON CENTER
 • 1/4" x 1-3/8" LONG EXPANSION BOLTS.
 (SOLID MASONRY REQUIRED)

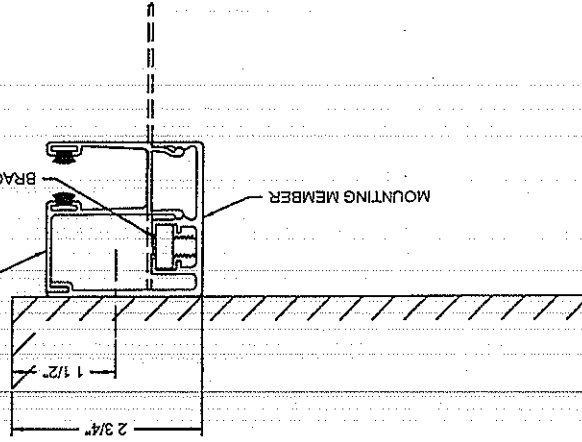

NOTE: Wall construction detail shown is for illustrative purposes only, does not imply compliance with building requirements, and must meet architectural specifications to properly support product. Products designed with wind load requirements must be properly fastened to structural members as specified in order to avoid catastrophic failure. Wall construction and closure installation shall be in accordance with the local authority having jurisdiction requirements.

WALL FASTENERS:
 AT MAXIMUM 18" ON CENTER
 • 1/4" x 1-3/8" LONG EXPANSION BOLTS.
 (SOLID MASONRY REQUIRED)

